

# PARTS LIST FOR SANSUI SPEAKER SYSTEM


PM-C200

Ref No. USP-51

## PM-C200

Sansui

### 1. PARTS LOCATION & PARTS LIST

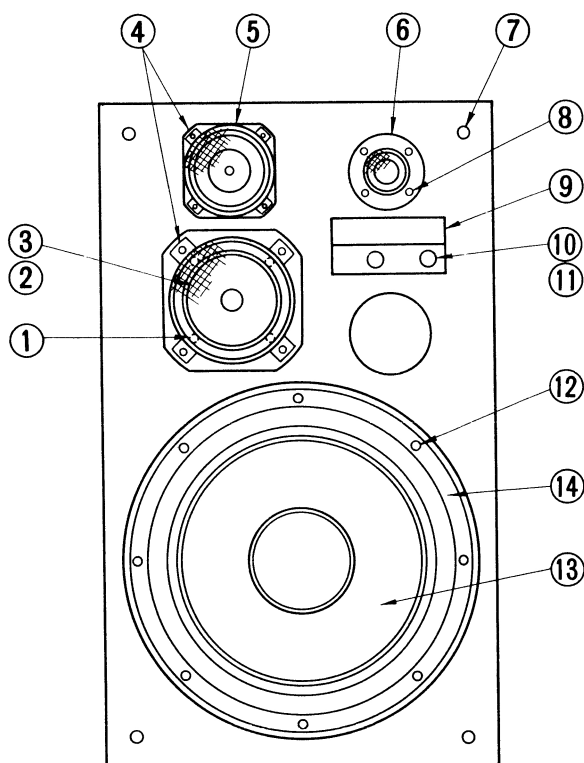

#### Parts List

Parts No.	Stock No.	Description
1	14354800	M4 x 25 Binding Head Tapping Screw
2	14345100	Midrange, S-174
3	14345600	Dress Ring for Midrange
4	14345800	M4 x 20 Hex Socket Wood Screw
5	14345200	Tweeter, T-212
6	14345300	Super Tweeter, T-213
7	14345400	Latch
8	14345800	M4 x 20 Hex Socket Wood Screw
9	14345900	Name Plate
10	14346200	Rotary Switch, RANGE
11	14346000	Knob
12	14345700	M5 x 30 Hex Socket Wood Screw
13	14345000	Woofer, W-248
14	14345500	Dress Ring for Woofer
	14346100	Front Grille Ass'y
	14354900	M3 x 14 Binding Head Tapping Screw (Strike)
	14354700	Strike

#### • How to extract the Level control knob

- 1) Putting the wire in the gap between name plate and level control knob. (Fig. 1-1)
- 2) Make one turn around pin of knob. (Fig. 1-2)
- 3) Pull out the wire to remove knob. (Fig. 1-2)

Fig. 1-1






Fig. 1-2

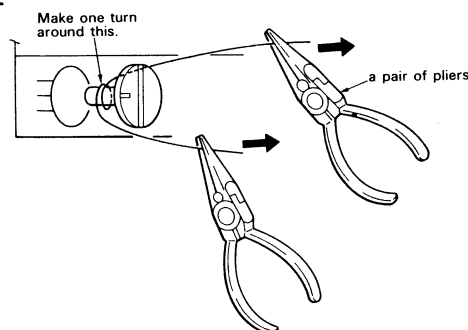



### 2. PACKING PARTS LIST

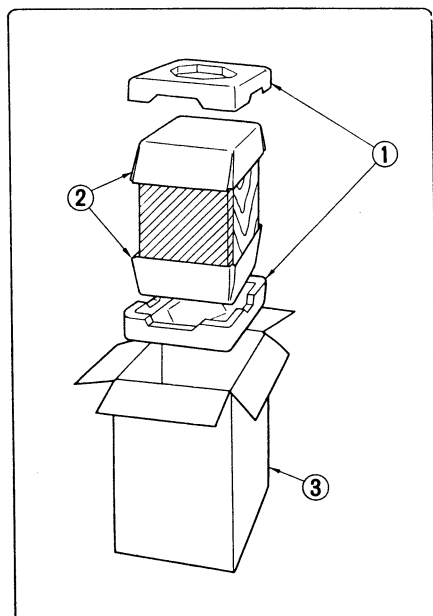

#### Parts List <PACKING>

Parts No.	Stock No.	Description
1	14346400	Styrofoam Packing
2	14346500	Inner Bag
3	14346600	Carton Case

3. CROSSOVER NETWORK

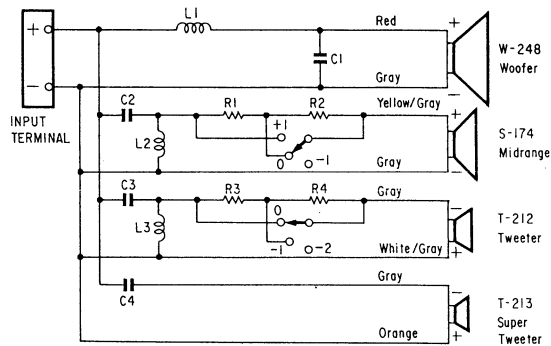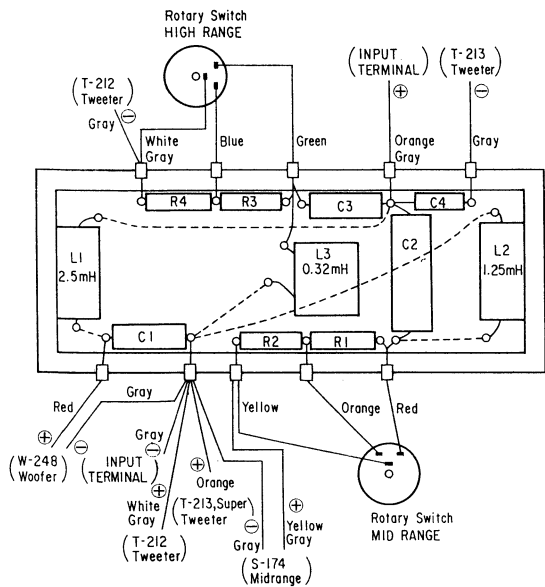

Parts List

Parts No.	Stock No.	Description
C1	14347200	33μF 50V E.B.
C2	14347400	15μF 50V E.B.
C3	14347500	3.3μF 50V E.B.
C4	14347300	1μF 50V E.B.
R1	14347700	1.5Ω 6W Ce.R.
R2	14347600	3.3Ω 6W Ce.R.
R3	14347600	3.3Ω 6W Ce.R.
R4	14347600	3.3Ω 6W Ce.R.
	14346300	2P Input Terminal

E.B.: Bi-Polar Electric Capacitor  
Ce.R.: Cement Resistor

4. ACCESSORY PARTS LIST

Stock No.	Description
14346800	Operating Instruction
14346700	Speaker Cord

5. SPECIFICATIONS

<b>Speakers used</b> .....	4-way 4-speaker-type	<b>Crossover frequencies</b> .....	1,000 Hz, 5,000 Hz, 10,000 Hz
Woofer.....	380 mm (15") Cone-type	<b>Enclosure</b> .....	Maple grain vinyl
Midrange.....	120 mm (4-3/4") Cone-type	<b>Dimensions</b> .....	445 mm (17-1/2") W
Tweeter.....	50 mm (1-15/16")		750 mm (29-1/2") H
	Plane diaphragm type		325 mm (12-3/4") D
Super tweeter .....	16 mm (5/8")	<b>Weight</b> .....	24 kg (52.9 lbs) net
	Plane diaphragm type		26 kg (57.3 lbs) packed
<b>Maximum input power</b> ....	320 watts	<b>* Design and specifications subject to changes without notice for improvements.</b>	
<b>Impedance</b> .....	8 ohms		
<b>Sensitivity</b> .....	93 dB/W (at 1 m)		
<b>Frequency range</b> .....	25 to 35,000 Hz (in normal listening room)		